

DS-D5024FC-C 24-inch Monitor



- Ultra-thin device body with ultra-thin border for 3 sides.
- 2 channels of 8 bit/10 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Built-in speaker for audio input.
- Support 1 channel BNC surveillance video input with professional surveillance standard BNC interface.
- Multimedia playing of text, image, audio, video, etc.
- Support VESA wall mount.

▪ Specification

Model		DS-D5024FC-C
Display	Screen Size	23.8 inch
	Active Display Area	527.04 (H) mm × 296.46 (V) mm
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.2745 (H) mm × 0.2745 (V) mm
	Brightness	250 cd/m ²
	Viewing Angle	178° (H) / 178° (V)
	Color Depth	8 bit, 16.7M
	Contrast Ratio	4000 : 1
	Response Time	6.5 ms
	Refresh Rate	60 Hz
	Haze	Haze 25%, 3H
	Reliability	7 × 18 H
	Color Gamut	72% NTSC
Interface	Video & Audio Input	HDMI 1.4 × 1, VGA × 1, CVBS × 1, AUDIO IN × 1
	Video & Audio Output	Speaker (2W 8Ω) × 2
Power	Power Supply	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 25 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 90% RH (non-condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	5% to 90% RH (non-condensing)
General	Casing Material	Plastic
	VESA	75 mm × 75 mm, 4-M6 × 6 screw holes
	Bezel Width	6.03 mm (top/left/right), 23.55 mm (bottom)

	Product Dimensions (W × H × D)	With base: 539.1 (W) mm × 433.199 (H) mm × 209.99(D) mm (21.22" × 17.05" × 8.27") Without base: 539.1 (W) mm × 328.325 (H) mm × 43.78 (D) mm (21.22" × 12.93" × 1.88")
	Package Dimensions (W × H × D)	650 (W) mm × 475 (H) mm × 135 (D) mm (25.5" × 18.7" × 5.31")
	Net Weight	3.2 ± 0.5 kg (7.1 ± 1.1 lb.)
	Gross Weight	4.9 ± 0.5 kg (10.8 ± 1.1 lb.)
	Packing List	Monitor × 1, AC power cable × 1, base bracket × 1, user manual × 1, quick start guide × 1, HDMI cable × 1
	Remarks	*The base is included by default. *The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information.

▪ **Available Model**


DS-D5024FC-C

▪ **Physical Interface**



Interface	Description	Interface	Description
VGA	VGA analog signal input	BNC	CVBS signal input
HDMI	HDMI digital signal input	USB	USB 2.0
AUDIO IN	3.5 mm audio input	AC 100–240V~	100 to 240 VAC, 50/60 Hz power supply

▪ **Dimension**

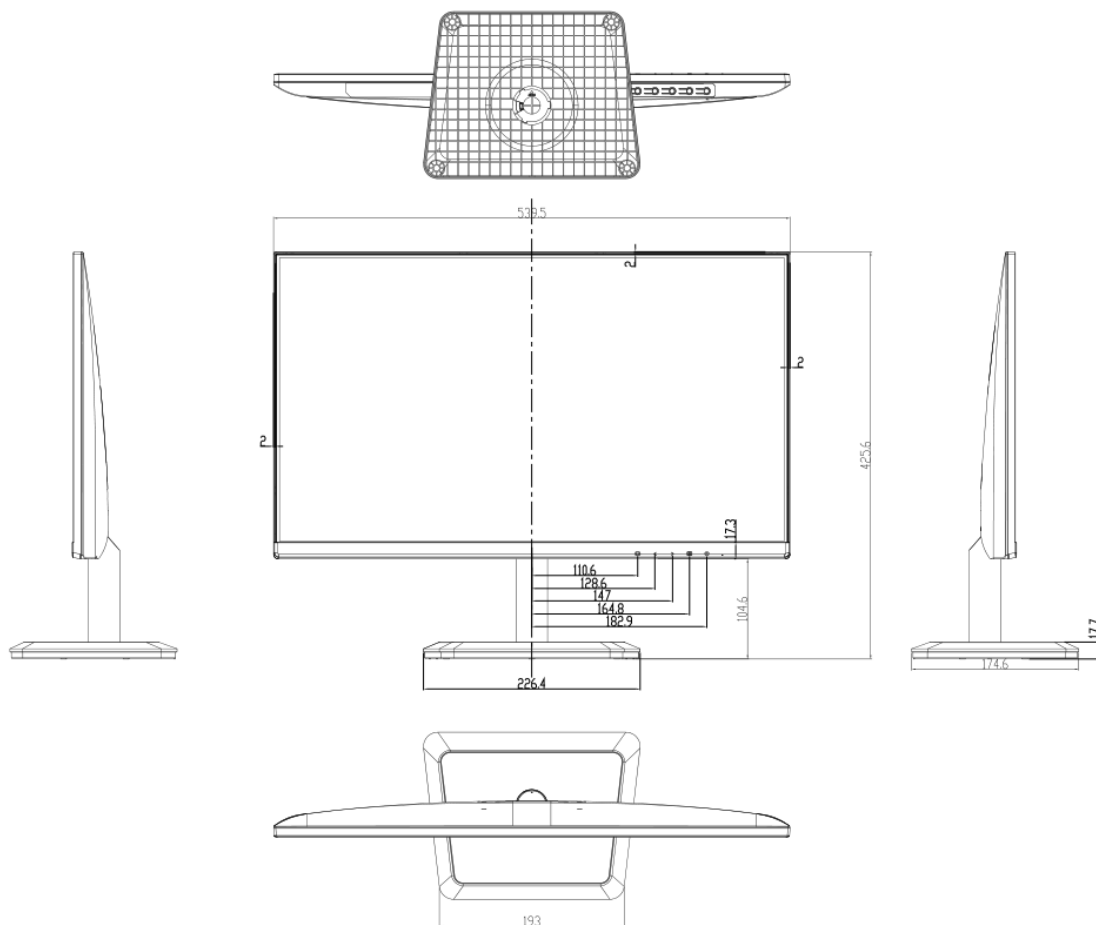

▪ **Accessory**

▪ **Optional**

DS-DM1940W
Wall-mounted
Bracket



Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
 www.hikvision.com



Follow us on social media to get the latest product and solution information.

