


# SPCN340

SPCN340.000 GSM (4G) Module incl. Antenna

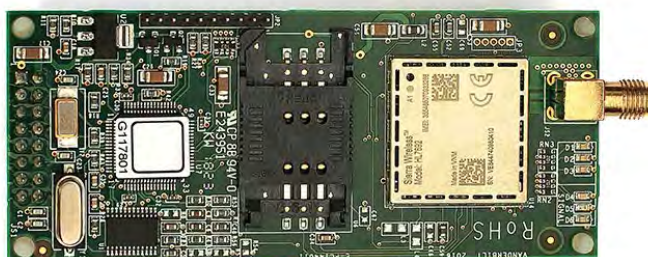


## Overview:

The SPCN340.000 GSM (4G) module can be assigned to any mobile network by the insertion of a standard SIM card. The modem is compatible with the complete range of SPC panels and plugs directly on the main PCB removing the need for any additional wiring.

The unit comes with an external antenna that fits on the cabinet. The modem communicates with an alarm receiving centre (ARC) using common analogue format protocols (SIA, Contact ID) or IP based protocols like EDP or FlexC over 2G/4G (FW3.11 or later) to transmit alarm event to compatible alarm receiving centres.

It also supports PPP connection to SPC Connect Pro Software for remote programming and configuration up-/download. The SMS feature allows user/engineer to be sent a predefined text when selected events occur in the system or receiving of predefined SMS commands for security system control. The GSM modem can be used as the primary source of communication or as backup to the PSTN modem or IP communication.

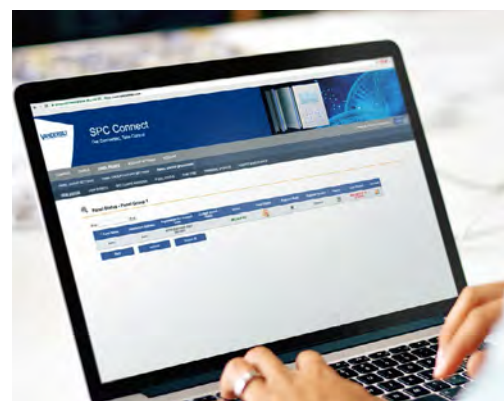

**VANDERBILT**

I-200367\_EN

Edition date: 18-12-2019

# SPCN340

SPCN340.000 GSM (4G) Module incl. Antenna

## Features & Benefits:

### ✓ WIRELESS REMOTE COMMUNICATION

The communication module enables the control panel to communicate with GSM (4G) or GPRS networks. The GSM (data) path is used as the primary communication path for multi-event alarm transmission to SIA/Contact ID standard receivers. The 4G or GPRS are used as backup for the Ethernet communication path for IP alarm event transmission to SPC Com XT (or FlexC/EDP compatible receivers).

### ✓ SMS REPORTING

The SPC system can support up to 100 SMS numbers (SPC6xxx) each number can have a unique filter of which events are to be sent.

### ✓ SMS CONTROL

Users who have SMS configured can be given the ability to Fullset, Unset, Restore alerts and/or control outputs remotely.

### ✓ EASY MOUNTING AND CONFIGURATION

The modem plugs directly onto the SPC controller main board removing the need for any additional wiring. All the module functions are configurable via the control panel.



### Additional Features:

- 4G/2G network support
- SMS events
- SMS commands
- FlexC and EDP protocol transmission via TCP/IP
- Analogue protocol transmission via SIA and CID
- Compliance with latest approval standards such as EN
- Low power consumption

**VANDERBILT**

I-200367\_EN

Edition date: 18-12-2019

# SPCN340

SPCN340.000 GSM (4G) Module incl. Antenna

Technical Data	
Network connection	4G frequencies: 800MHz/900MHz/1800MHz 2G frequencies: 900 MHz/1800MHz
Operating current	Max. 130 mA at 12 VDC
Quiescent current	Max. 40 mA at 12 VDC
Operating temperature	-10° ~ +50 °C
Dimensions	90 x 38 x 25 (PCB)
Relative humidity	Max. 90 % (non-condensing)
Mounting	Plug on module to SPC controller
Weight	0.130 kg
Approvals	EN, SES, VDS

## Ordering Information:

Type	Art. No.	Description	Weight*
SPCN340.000	V54550-B102-A300	GSM (4G) Module incl. Antenna	0.300kg
SPCW101.000	V54559-B101-A100	External aerial kit	0.090kg

Data and design subject to change without notice.

an **ACRE**  
company


[vanderbiltindustries.com](http://vanderbiltindustries.com)

 @VanderbiltInd

 Vanderbilt Industries

**Vanderbilt International Ltd.**

Clonshaugh Business and Technology Park  
Clonshaugh, Dublin D17 KV 84, Ireland

 +353 1 437 2560