

#### iDS-2SK7184MXS-D Smart-Linkage PTZ Camera



The smart-linkage PTZ camera adopts an all-in-one design with two camera channels and high-performance GPU. Integrated with multiple deep learning algorithms for complicated scenes, it provides accurate collection of target feature data, comprehensive data analysis of multiple scenes, and all-around situational perception. The smart-linkage PTZ camera can be widely used for large areas that need high-definition monitoring and smart capture, such as intersections, T-junctions, squares, borderlines, and parks.

- Multi-target-type detection: support automatic person detection and quick capture for face comparison, and link face and human body
- Smart events: The panoramic channel arms the detection area and links the PTZ channel to track targets and output alarms
- Face capture: The PTZ channel locks onto and captures detected face
- Tracking takeover: In smart events, when the target moves out of the panoramic view, the PTZ channel continues to track the target in a larger area
- Support simultaneous capture, linked output, and feature abstraction of face and human body
- Adjustable pan and tilt position for both channels. Panoramic channel: pan 0 to 360° endless, tilt 0 to 30°. PTZ channel: pan 0 to 330°, tilt -10° to 90°
- Auto calibration: Once calibrated, no need for calibration at other PTZ positions
- Built-in memory card slot
- Easy-to-install all-in-one design with one IP address, one network cable, one power supply, and no server





#### DORI

The DORI (detect, observe, recognize, identify) distance gives the general idea of the camera ability to distinguish persons or objects within its field of view.

It is calculated based on the camera sensor specification and the criteria given by EN 62676-4: 2015.

| DORI            | Detect              | Observe            | Recognize          | Identify          |
|-----------------|---------------------|--------------------|--------------------|-------------------|
| Definition      | 25 px/m             | 63 px/m            | 125 px/m           | 250 px/m          |
| Distance (Tele) | 662.1 m (2172.2 ft) | 262.7 m (861.9 ft) | 132.4 m (434.4 ft) | 66.2 m (217.2 ft) |

### Specification

| Camera Module           |   |
|-------------------------|---|
| Image Sensor            | [Panoramic channel]: 1/1.8" progressive scan CMOS,                                  |
|                         | [PTZ channel]: 1/1.2" progressive scan CMOS   |
| Min. Illumination       | [Panoramic channel]: Color: 0.0005 Lux @(F1.0, AGC ON), B/W: 0.0001 Lux @(F1.0,     |
|                         | AGC ON);  |
|                         | [PTZ channel] Color: 0.0005 Lux @(F1.6, AGC ON), B/W: 0.0001 Lux @(F1.6, AGC ON), 0 |
|                         | lux with IR   |
| Shutter Speed           | 1 to 1/30000 s  |
| Slow Shutter            | yes   |
| Focus                   | semi-auto, manual, auto   |
| Day & Night             | ICR   |
| Day/Night Switch        | day, night, auto, scheduled-switch  |
| BLC                     | yes   |
| WDR                     | 120 dB WDR  |
| HLC                     | yes   |
| 3D DNR                  | yes   |
| Defog                   | yes   |
| EIS                     | yes   |
| Regional Exposure       | yes   |
| Regional Focus          | yes   |
| Image Settings          | saturation, brightness, contrast, sharpness   |
| Image Parameters Switch | yes   |
| White Balance           | auto, ATW, sodium lamp, fluorescent lamp, indoor, outdoor, MWB                      |
| Digital Zoom            | [panoramic channel] no; [PTZ channel] 16×   |
| Optical Zoom            | [panoramic channel] no; [PTZ channel] 5×  |
| Privacy Mask            | up to 24 masks, polygon region, mosaic mask, mask color configurable                |
| SNR                     | ≥52dB   |
| General Function        | mirror, password protection, watermark, IP address filter                           |
| Gain Control            | auto, manual  |
| Lens                    |   |
| Focal Length            | [Panoramic channel] 6 mm; [PTZ channel] 10 to 50 mm                                 |
| Zoom Speed              | [PTZ channel] Approx. 1.1 s   |



|                       | [Panoramic channel]   |  |
|-----------------------|---|--|
|                       | horizontal field of view: 58.4°,  |  |
|                       | vertical field of view: 31°,  |  |
|                       | Diagonal field of view: 68.7°;  |  |
| FOV                   | [PTZ channel]   |  |
|                       | horizontal field of view: 36° to 13.1°,   |  |
|                       | vertical field of view: 20.3° to 7.3°,  |  |
|                       | diagonal field of view: 41° to 14.85°   |  |
| Aperture              | [panoramic channel] F1.0; [PTZ channel] F1.6  |  |
| PTZ                   |   |  |
| Movement Range (Pan)  | [panoramic channel] 0 to 360°, [PTZ channel] 0 to 330°                              |  |
| Movement Range (Tilt) | [panoramic channel] 0 to 30°, [PTZ channel] -10° to 90°                             |  |
|                       | [panoramic channel] pan speed: configurable from 0.1° to 100°/s;                    |  |
| Pan Speed             | [PTZ channel] pan speed: configurable from 0.1° to 210°/s                           |  |
|                       | [panoramic channel] tilt speed: configurable from 0.1° to 25°/s; [PTZ channel] tilt |  |
| Tilt Speed            | speed: configurable from 0.1° to 150°/s   |  |
| Proportional Zoom     | [panoramic channel]: no; [PTZ channel]: yes   |  |
| Presets               | 300   |  |
| Patrol Scan           | 8 patrols, up to 32 presets for each patrol   |  |
| Pattern Scan          | 4 pattern scans   |  |
| Power-off Memory      | yes   |  |
| Park Action           | preset, pattern scan, patrol scan, auto scan  |  |
| 3D Positioning        | yes   |  |
| PTZ Status Display    | yes   |  |
| Preset Freezing       | yes   |  |
| Scheduled Task        | preset, pattern scan, patrol scan, auto scan, dome reboot, dome adjust, aux output  |  |
| Exception Detection   | IP address conflict, HDD full, illegal login, HDD error, network disconnected       |  |
| Video                 |   |  |
| Max. Resolution       | [panoramic channel] 2560 × 1440, [PTZ channel] 3840 × 2160                          |  |
| Stream Type           | main stream, sub-stream, third stream   |  |
|                       | [panoramic channel]   |  |
|                       | 50 Hz: 25 fps (2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720)                    |  |
|                       | 60 Hz: 30 fps (2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720)                    |  |
| Main Stream           | [PTZ channel]   |  |
|                       | 50 Hz: 25 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720)       |  |
|                       | 60 Hz: 30 fps (3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720)       |  |
|                       | [panoramic channel]   |  |
|                       | 50 Hz: 25 fps (704 × 576, 640 × 480, 352 × 288)                                     |  |
| Sub Stroom            | 60 Hz: 30 fps (704 × 480, 640 × 480, 352 × 240)                                     |  |
| Sub-Stream            | [PTZ channel]   |  |
|                       | 50 Hz: 25 fps (704 × 576, 640 × 480, 352 × 288)                                     |  |
|                       | 60 Hz: 30 fps (704 × 480, 640 × 480, 352 × 240)                                     |  |



|                             | [nanoramic channel]  |  |  |
|-----------------------------|--|--|--|
|                             | [panoramic channel] 50 Hz: 25 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288) |  |  |
|                             | 60 Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 376, 640 × 480, 352 × 266)                     |  |  |
| Third Stream                | [PTZ channel]  |  |  |
|                             | 50 Hz: 25 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288)                     |  |  |
|                             | 60 Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240)                     |  |  |
| Video Compression           | H.265, H.264, MJPEG  |  |  |
| Video Bit Rate              | 32 to 16384 kbps   |  |  |
| H.264 Type                  | baseline profile, main profile, high profile   |  |  |
| H.265 Type                  | main profile   |  |  |
| H.264+                      | yes  |  |  |
| H.265+                      | yes  |  |  |
| SVC                         | yes  |  |  |
| ROI                         | dynamic face tracking, fixed region  |  |  |
| Audio                       |  |  |  |
| Audio Compression           | G.711alaw/G.711ulaw/G.722.1/G.726/MP2L2/PCM  |  |  |
| Audio Dit voto              | MP2L2: 32 kbps, 40 kbps, 48 kbps, 56 kbps, 64 kbps, 80 kbps, 96 kbps, 112 kbps, 128                      |  |  |
| Audio Bit rate              | kbps, 144 kbps, 160 kbps, 192 kbps   |  |  |
| Audio Sampling Rate         | MP2L2: 16 kHz, 32 kHz, 48 kHz, PCM: 8 kHz, 16 kHz, 32 kHz, 48 kHz  |  |  |
| Environment Noise Filtering | yes  |  |  |
| Smart Features              |  |  |  |
| Feature Abstraction         | face feature abstraction, human body feature abstraction, vehicle feature abstraction                    |  |  |
|                             | Support face, human body, and vehicle capture, track and grade the target, and output                    |  |  |
| Multi-target-type Detection | the best capture picture; support face and human body feature analysis, modeling and                     |  |  |
|                             | comparison   |  |  |
| Face Comparison             | yes  |  |  |
| Basic Event                 | audio exception, motion detection, alarm input, alarm output, video tampering alarm,                     |  |  |
|                             | exception  |  |  |
| Smart Event                 | intrusion detection, line crossing detection, region entrance detection, region exiting detection        |  |  |
| Smart Tracking              | panorama tracking, event tracking  |  |  |
| Smart Record                | ANR, Dual-VCA  |  |  |
|                             | preset, patrol scan, pattern scan, memory card video recording, alarm output, sending                    |  |  |
| Alarm Linkage               | email, notify surveillance center, upload to FTP   |  |  |
| Smart Encoding              | H.265+, H.264+, ROI, SVC   |  |  |
| Network                     |  |  |  |
| Network Storage             | NAS (NFS, SMB/ CIFS),ANR   |  |  |
| D 1                         | IPv4/IPv6,HTTP,HTTPS,802.1x,Qos,FTP,SMTP,UPnP,SNMP,DNS,DDNS,NTP,RTSP,RTCP,R                              |  |  |
| Protocols                   | TP,TCP/IP,UDP,IGMP,ICMP,DHCP,PPPoE,Bonjour   |  |  |
| ADI                         | Open-ended API, ISAPI, Hikvision SDK, Third-party management platform, Hik-Connect,                      |  |  |
| API                         | ISUP, Open Network Video Interface   |  |  |
| Simultaneous Live View      | Up to 20 channels  |  |  |
| User/Host                   | Up to 32 users. 3 levels: Administrator, Operator and User   |  |  |
| Security Measures           | Authenticated username and password, MAC address binding, HTTPS encryption,                              |  |  |
|                             | 802.1X authenticated access, IP address filter   |  |  |




| Client                        | iVMS-4200, Hik-Connect, HikCentral  |  |  |
|-------------------------------|---|--|--|
| Web Browser                   | IE10+, Chrome57+, Firefox52+, Safari12+   |  |  |
| Interface                     |   |  |  |
| Communication Interface       | RJ45, self-adaptive, 1000 M Ethernet Interface  |  |  |
| On-board Storage              | support microSD/microSDHC/microSDXC cards, up to 256 GB                                 |  |  |
| Alarm Input                   | 2 alarm inputs  |  |  |
| Alarm Output                  | 1 alarm output  |  |  |
| Audio Input                   | 1 audio input, 2.0 to 2.4Vp-p, 1k Ohm±10%   |  |  |
| Audio Output                  | 1 audio output, line level, impedance: $600\Omega$                                      |  |  |
| RS-485                        | Half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive                                 |  |  |
| Supplement Light              |   |  |  |
| White Light Distance          | [panoramic channel] up to 50 m  |  |  |
| Write Light Distance          | [PTZ channel] up to 20 m  |  |  |
| IR Distance                   | [PTZ channel] up to 200 m   |  |  |
| Smart IR                      | yes   |  |  |
| General                       |   |  |  |
| Power                         | 36 VDC ± 25%  |  |  |
| Power Consumption and Current | Max. 70 W   |  |  |
| Operating Conditions          | -40°C to 70°C, humidity lower than 95%RH  |  |  |
| Reset                         | yes   |  |  |
| Wiper                         | [panoramic channel]: no; [PTZ channel]: yes   |  |  |
| Demist                        | yes   |  |  |
| Material                      | ADC12, PC+10%GF   |  |  |
| Dimensions                    | Ø 320 mm × 393 mm (Ø 12.6" × 15.47")  |  |  |
| Weight                        | Approx. 10.6 kg (23.37 lb.)   |  |  |
|                               | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, |  |  |
| Web Client Language           | Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish,   |  |  |
| The officer Language          | Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, |  |  |
|                               | Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian         |  |  |
| Approval                      |   |  |  |
| Protection                    | IP66  |  |  |


# Available Model

iDS-2SK7184MXS-D(C5F2) (T2)



### Dimension

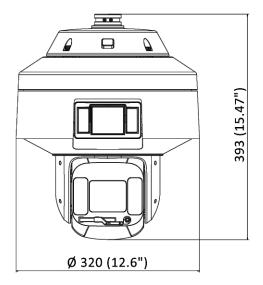

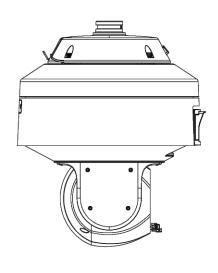


Unit: mm (inch)

- Accessory
- Included



### Optional

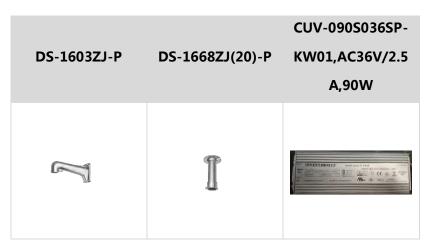



Distributed by

## HIKVISION'

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision,com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thalland T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T+31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 Info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 [216]521 7070- 7074 sales,tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33[0]1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T+971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 Info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

@ Hikvision Digital Technology Co., Ltd. 2020 | Data subject to change without notice |