






AE-238/239/243/244 Outdoor Enclosures - Value Series

Value Series outdoor enclosures are compatible with all VIVOTEK box cameras, including wide-angle lenses or long-distance remote focus lenses. The camera enclosures are constructed from cast aluminum to meet IP68, and IK 10 standards.

AE-238 and AE-243 are supported by 24VAC/VDC input, AE-239 and AE-244 are supported by PoE input, AE-243 and AE-244 are designed with built-in IR immluminator, all of them are equipped with demisting windows heater & fan.

Key Features

- Weather-proof IP68-rated
- · Vandal-proof IK10-rated Cast Aluminum Housing
- \cdot Window Demister Heater and Fan
- · 24VAC/VDC Power Input (AE-238/AE-243)
- PoE at 30W Power Input (AE-239/AE-244)
- · Built-in IR LEDs Viewing up to 50M (AE-243/AE-244)

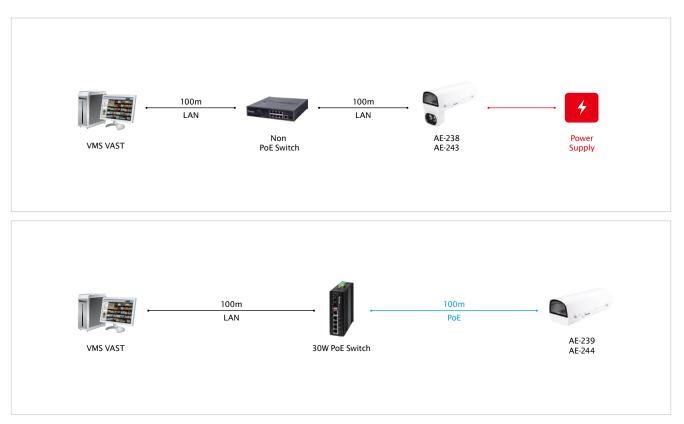

Application

Technical Specifications

				•	
Model Name	AE-238	AE-239	AE-243	AE-244	
Input Voltage	24VAC/VDC	PoE at 30W 50-57VDC	24VAC/VDC	PoE at 30W 50-57VDC	
Max Output Power Budget	30W	30W	30W	30W	
IR LEDs Range	-	-	Up to 50m	Up to 50m	
Power Consumption	Window Heater: 10W Blower: 2W Camera: 6 ~ 8W Others: 2W	Window Heater: 10W Blower: 2W Camera: 6 ~ 8W Others: 2W	Window Heater: 10W Blower: 2W Camera: 6 ~ 8W IR LEDs: 6W Others: 2W	Window Heater: 10W Blower: 2W Camera: 6 ~ 8W IR LEDs: 6W Others: 2W	
Operating Temperature	-20°C ~ 65°C (-4°F ~ 149°F)	-20°C ~ 65°C (-4°F ~ 149°F)	-20°C ~ 65°C (-4°F ~ 149°F)	-20°C ~ 65°C (-4°F ~ 149°F)	
Windows Heater ON/OFF	≤ 30°C (86°F) ON ≥ 35°C (95°F) OFF	≤ 30°C (86°F) ON ≥ 35°C (95°F) OFF	≤ 30°C (86°F) ON ≥ 35°C (95°F) OFF	≤ 30°C (86°F) ON ≥ 35°C (95°F) OFF	
Fan ON/OFF	≥ 40°C (104 °F) ON ≤ 35°C (95 °F) OFF	≥ 40°C (104 °F) ON ≤ 35°C (95 °F) OFF	≥ 40°C (104 °F) ON ≤ 35°C (95 °F) OFF	≥ 40°C (104 °F) ON ≤ 35°C (95 °F) OFF	
Waterproof IP Rating	IP68	IP68	IP68	IP68	
Vandal Proof	IK10 Impact Rated on Cast Aluminum Housing	IK10 Impact Rated on Cast Aluminum Housing	IK10 Impact Rated on Cast Aluminum Housing	IK10 Impact Rated on Cast Aluminum Housing	
Supported Cameras	All VIVOTEK Box Cameras	All VIVOTEK Box Cameras	All VIVOTEK Box Cameras	All VIVOTEK Box Cameras	
Included Accessories	Installation Guide Screw Kit	Installation Guide Screw Kit	Installation Guide Screw Kit	Installation Guide Screw Kit	


Compatible Accessories

Wall Mount Bracket		Ceiling Mount Bracket	Standing Mount Bracket	
	and and a second se	J		
AM-21D	AM-21E design with quick lock and safety rope	AM-11F	AM-811	
		Pole Mount Bracket		
	OR .	+	DR	
AM-21D	AM-21E	AM-314	AM-315	
P	Power Box	Sun Shield		
AA-351	AA-352	AE-2S1		

Value Series - Comparison Table

	24VAC/VDC In	PoE 30W In	Window Heater	Fan	Built-In 6W Fixed IR LED	IP68
AE-238	V	-	V	V	-	V
AE-239	-	V	V	V	-	V
AE-243	V	-	V	V	V	V
AE-244	-	V	V	V	V	V

Dimension

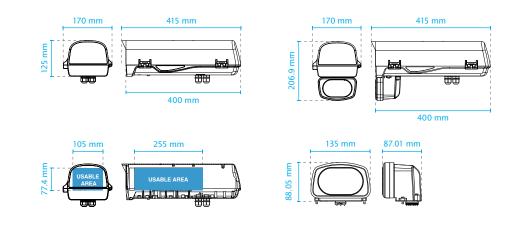



All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 11